


Lecture 17 - Incompressible fluid flow and heat transfer, cont'd

17.1 Abstract body

Reading:
Sec. 7.4

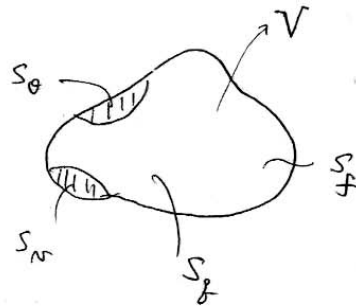

Fluid Flow

$$S_v, S_f$$

$$S_v \cup S_f = S$$

$$S_v \cap S_f = 0$$


Heat transfer

$$S_\theta, S_q$$

$$S_\theta \cup S_q = S$$

$$S_\theta \cap S_q = 0$$

17.2 Actual 2D problem (channel flow)

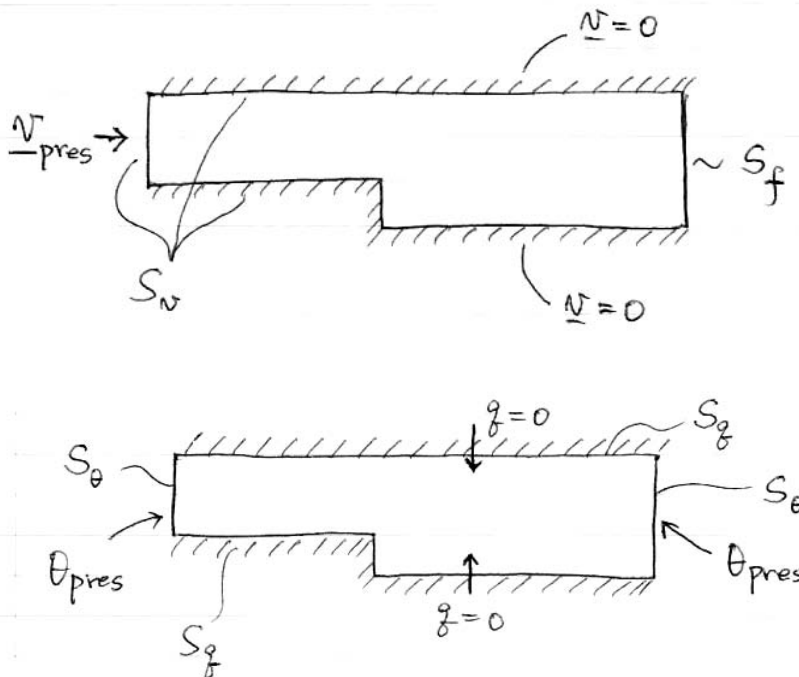

17.3 Basic equations

P.V. velocities

$$\int_V \bar{v}_i \rho v_{i,j} v_j dV + \int_V \tau_{ij} \bar{e}_{ij} dV = \int_V \bar{v}_i f_i^B dV + \int_{S_f} \bar{v}_i^{S_f} f_i^{S_f} dS_f \quad (17.1)$$

Continuity

$$\int_V \bar{p} v_{i,i} dV = 0 \quad (17.2)$$

P.V. temperature

$$\int_V \bar{\theta} \rho c_p \theta_{,i} v_i dV + \int_V \bar{\theta}_{,i} k \theta_{,i} dV = \int_V \bar{\theta} q^B dV + \int_{S_q} \bar{\theta}^S q^S dS \quad (17.3)$$

F.E. solution

$$x_i = \sum h_k x_i^k \quad (17.4)$$

$$v_i = \sum h_k v_i^k \quad (17.5)$$

$$\theta = \sum h_k \theta_k \quad (17.6)$$


$$p = \sum \tilde{h}_k p_k \quad (17.7)$$

$$\Rightarrow \boxed{\mathbf{F}(\mathbf{u}) = \mathbf{R}} \quad \mathbf{u} = \begin{pmatrix} \mathbf{v} \\ \mathbf{p} \\ \boldsymbol{\theta} \end{pmatrix} \text{ nodal variables} \quad (17.8)$$

17.4 Model problem

1D equation,

$$\rho c_p v \frac{d\theta}{dx} = k \frac{d^2\theta}{dx^2} \quad (17.9)$$

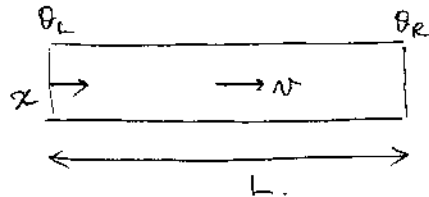


(v is given, unit cross section)

Non-dimensional form (Section 7.4)


$$\boxed{\text{Pe} \frac{d\theta}{dx} = \frac{d^2\theta}{dx^2}} \quad (17.10)$$

$$Pe = \frac{vL}{\alpha}, \quad \alpha = \frac{k}{\rho c_p} \quad (17.11)$$



θ^* is non-dimensional


$$\frac{\theta - \theta_L}{\theta_R - \theta_L} = \frac{\exp\left(\frac{Pe x}{L}\right) - 1}{\exp(Pe) - 1} \quad (17.12)$$

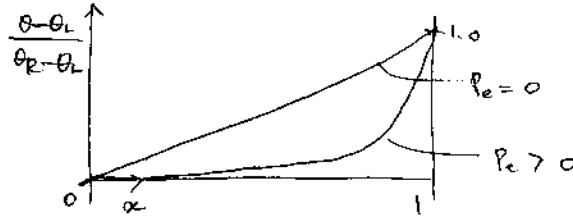

(17.10) in F.E. analysis becomes

$$\int_V \bar{\theta} Pe \frac{d\theta}{dx} dV + \int_V \frac{d\bar{\theta}}{dx} \frac{d\theta}{dx} dV = 0 \quad (17.13)$$

Discretized by linear elements:



$$h^* = \frac{h}{L}$$

$$\theta(\xi) = \left(1 - \frac{\xi}{h^*}\right) \theta_{i-1} + \frac{\xi}{h^*} \theta_i \quad (17.14)$$

For node i :

$$-\theta_{i-1} - \frac{Pe^e}{2} \theta_{i-1} + 2\theta_i - \theta_{i+1} + \frac{Pe^e}{2} \theta_{i+1} = 0 \quad (17.15)$$

where

$$Pe^e = \frac{vh}{\alpha} \quad \left(= Pe \frac{h}{L}\right) \quad (17.16)$$

This result is the same as obtained by finite differences

$$\theta'' \Big|_i = \frac{1}{(h^*)^2} (\theta_{i+1} - 2\theta_i + \theta_{i-1}) \quad (17.17)$$

$$\theta' \Big|_i = \frac{\theta_{i+1} - \theta_{i-1}}{2h^*} \quad (17.18)$$

Considered $\theta_{i+1} = 1$, $\theta_{i-1} = 0$. Then

$$\theta_i = \frac{1 - (\text{Pe}^e/2)}{2} \quad (17.19)$$

Physically unrealistic solution when $\text{Pe}^e > 2$. For this not to happen, we should refine the mesh—a very fine mesh would be required. We use “upwinding”

$$\left. \frac{d\theta}{dx} \right|_i = \frac{\theta_i - \theta_{i-1}}{h^*} \quad (17.20)$$

The result is

$$(-1 - \text{Pe}^e)\theta_{i-1} + (2 + \text{Pe}^e)\theta_i - \theta_{i+1} = 0 \quad (17.21)$$


Very stable, e.g.

$$\left. \begin{array}{l} \theta_{i-1} = 0 \\ \theta_{i+1} = 1 \end{array} \right\} \Rightarrow \theta_i = \frac{1}{2 + \text{Pe}^e} \quad (17.22)$$

Unfortunately it is not that accurate. To obtain better accuracy in the interpolation for θ , use the function

$$\frac{\exp(\text{Pe}^e \frac{x}{L}) - 1}{\exp(\text{Pe}^e) - 1} \quad (17.23)$$

The result is Pe^e dependent:

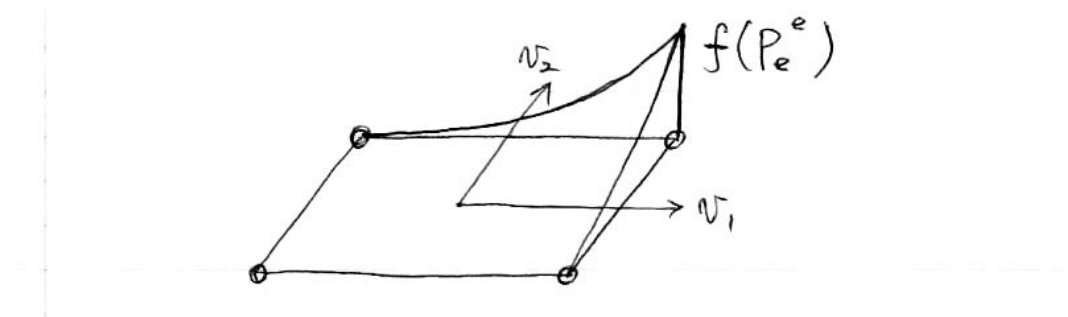


This implies flow-condition based interpolation. We use such interpolation functions—see references.

References

- [1] K.J. Bathe and H. Zhang. “A Flow-Condition-Based Interpolation Finite Element Procedure for Incompressible Fluid Flows.” *Computers & Structures*, 80:1267–1277, 2002.
- [2] H. Kohno and K.J. Bathe. “A Flow-Condition-Based Interpolation Finite Element Procedure for Triangular Grids.” *International Journal for Numerical Methods in Fluids*, 51:673–699, 2006.

17.5 FSI briefly

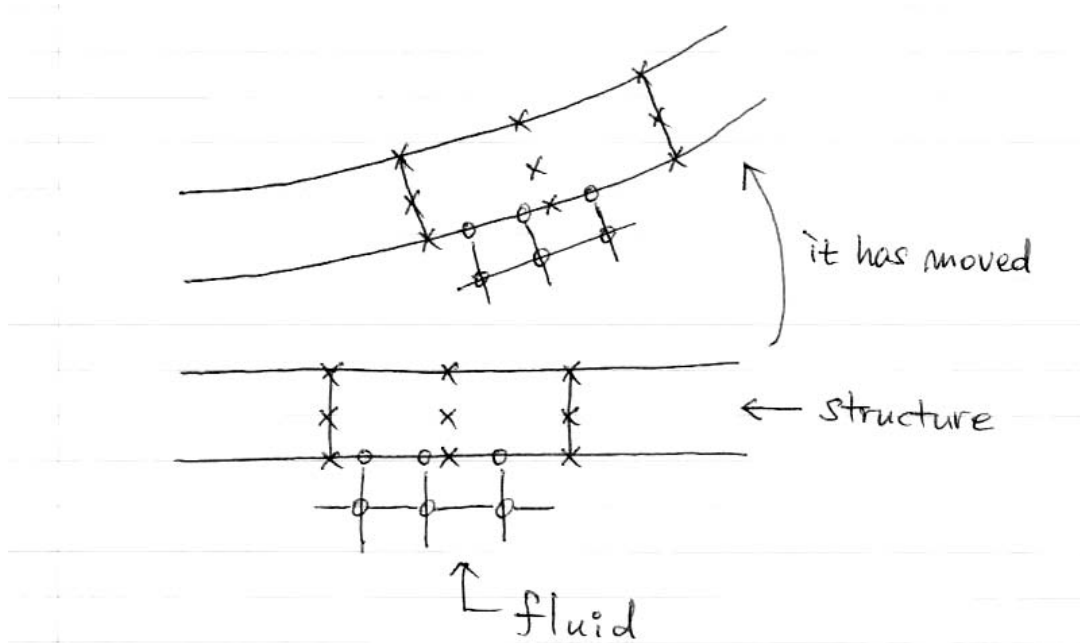

Lagrangian formulation for the structure/solid

Arbitrary Lagrangian-Eulerian (ALE) formulation Let f be a variable of a particle (e.g. $f = \theta$). Consider 1D

$$\dot{f}\Big|_{\text{particle}} = \frac{\partial f}{\partial t} + \frac{\partial f}{\partial x}v \quad (17.24)$$

where v is the particle velocity. For a mesh point,

$$f^*\Big|_{\text{mesh point}} = \frac{\partial f}{\partial t} + \frac{\partial f}{\partial x}v_m \quad (17.25)$$

where v_m is the mesh point velocity. Hence,

$$\dot{f}\Big|_{\text{particle}} = f^*\Big|_{\text{mesh point}} + \frac{\partial f}{\partial x}(v - v_m) \quad (17.26)$$

Use (17.26) in the momentum and energy equations and use force equilibrium and compatibility at the FSI boundary to set up the governing F.E. equations.

References

- [1] K.J. Bathe, H. Zhang and M.H. Wang. "Finite Element Analysis of Incompressible and Compressible Fluid Flows with Free Surfaces and Structural Interactions." *Computers & Structures*, 56:193–213, 1995.
- [2] K.J. Bathe, H. Zhang and S. Ji. "Finite Element Analysis of Fluid Flows Fully Coupled with Structural Interactions." *Computers & Structures*, 72:1–16, 1999.
- [3] K.J. Bathe and H. Zhang. "Finite Element Developments for General Fluid Flows with Structural Interactions." *International Journal for Numerical Methods in Engineering*, 60:213–232, 2004.

MIT OpenCourseWare
<http://ocw.mit.edu>

2.094 Finite Element Analysis of Solids and Fluids II
Spring 2011

For information about citing these materials or our Terms of Use, visit: <http://ocw.mit.edu/terms>.